




IDEAL WAREHOUSE
INNOVATIONS INC

Protecting Your People

TCS-3000 SURE LITE INSTALLATION INSTRUCTIONS

1. Mount TCS-3000 SURE LITE

- Decide on location of TCS-3000 SURE LITE.
- Place TCS-3000 SURE LITE against wall in desired location and using existing holes, mark hole locations with pencil.
- Fasten TCS-3000 SURE LITE to wall using concrete screws (supplied by others).

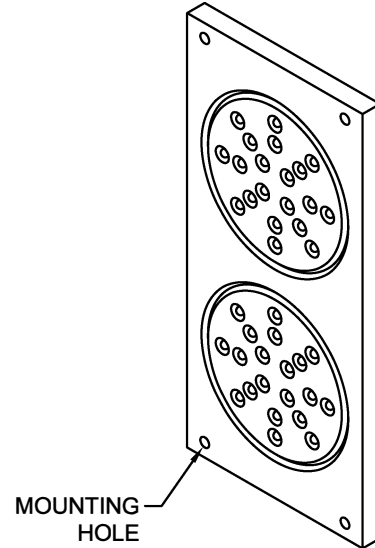

Voltage

120 VAC, 60hz, 3mA

2. Connecting TCS-3000 SURE LITE

120V- Connect the **WHITE** wire to neutral conductor.

- Connect the **RED** wire to the 120V conductor that will turn on the red light .
- Connect the **BLACK** wire to the 120V conductor that will turn on the green light.

Voltage

12/24 VAC, 60hz, 200mA

12/24 VDC, 200mA

3a. Connecting TCS-3000 SURE LITE (24 VAC/VDC)

24V - Connect the **BLACK** wire to 24V common conductor.

- Connect the **RED** wire to the 24V conductor that will turn on the red light .
- Connect the **WHITE** wire to the 24V conductor that will turn on the green light.

3b. Connecting TCS-3000 SURE LITE (12 VAC/VDC)

12V - Connect the **BLACK** wire to 12V common conductor.

- Connect the **RED** wire to the 12V conductor that will turn on the red light.
- Connect the **GREEN** wire to the 12V conductor that will turn on the green light.

