


SlowStop® Rebounding Bollard – 4” (60-5201)

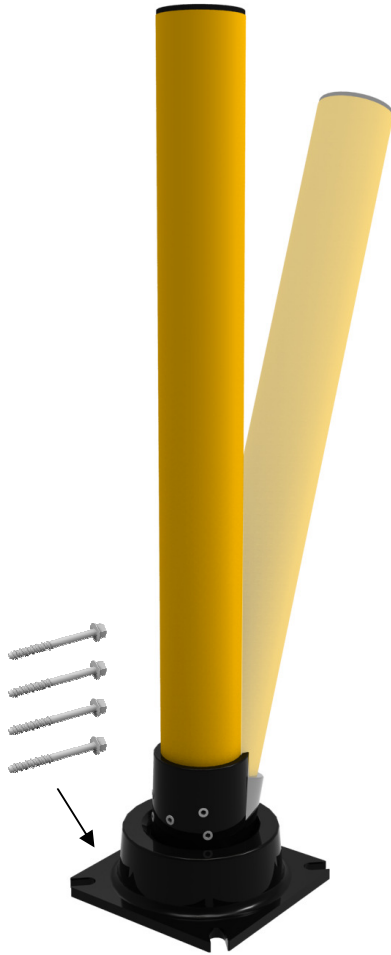

Installs with four (4) 5/8” x 5-1/2”
Concrete Screw Anchors

Color: RAL 1023 Safety Yellow Bollard
RAL 9005 Black Base

Diameter: 4” [101.6mm] (3.5” ANSI Schedule 40 Pipe)
Height: 42” [1067mm]

Set Screws: 5 M16 x 2.00
8mm Hex

Cap: Black Plastic

MASS (LBS)	1000	2000	3000	4000	5000	7500	10000	12500	15000
SPEED (MPH)									
1.0	Green	Green	Green	Green	Green	Green	Green	Green	Green
1.5	Green	Green	Green	Green	Green	Green	Green	Green	Green
2.0	Green	Green	Green	Green	Green	Green	Green	Green	Green
2.5	Green	Green	Green	Green	Green	Green	Green	Green	Green
3.0	Green	Green	Green	Green	Green	Green	Green	Green	Green
3.5	Green	Green	Green	Green	Green	Green	Green	Green	Green
4.0	Green	Green	Green	Green	Green	Green	Green	Green	Green
4.5	Green	Green	Green	Green	Green	Green	Green	Green	Green
5.0	Green	Green	Green	Green	Green	Green	Green	Green	Green
5.5	Green	Green	Green	Green	Green	Green	Green	Green	Green
6.0	Green	Green	Green	Green	Green	Green	Green	Green	Green
6.5	Green	Green	Green	Green	Green	Green	Green	Green	Green

No Damage / Negligible Damage
Will Stop / Potential Damage to Guard
Guard is under-sized

SPECIFICATIONS

- Stopping Power: 5,334 joules / 3,934 ft-lb.
- No Damage Rating: 2,667 joules / 1,967 ft-lb.
- Temperature Rating: -40°C/°F
- Pipe Coating: 60µm Hot Dipped Galvanized + 60µm Polyester Outdoor Powder Coat
- Cast Iron Coating: Environmentally Friendly Water-Based KTL Coating plus Powder Coat C5I Rated.

RECOMMENDED USES

- Medium Duty
- Equipment and Storage Rack Guarding
- Drive-Thru Lanes
- Pedestrian Safety
- Access Denial
- Fuel Pump and Utility Protection
- Post-tensioned Concrete
- Not for K-Rated Security Use



Toll-Free Phone: **1-866-828-6737**

Toll-Free Fax: **1-844-899-0088**

idealwarehouse.com info@idealwarehouse.com