


SlowStop® 3" Modular FlexRail PC Guardrail (SS3Y-GRS)



MASS (LBS)	2500	5000	7500	10000	15000	20000	25000	40000	80000
SPEED (MPH)									
1.0									
2.0									
3.0									
4.0									
5.0									
6.0									
7.0									
8.0									
9.0									
10.0									
11.0									
12.0									

No / Negligible Damage
Will Stop / Potential Damage to Guard
Guard is Under-Sized

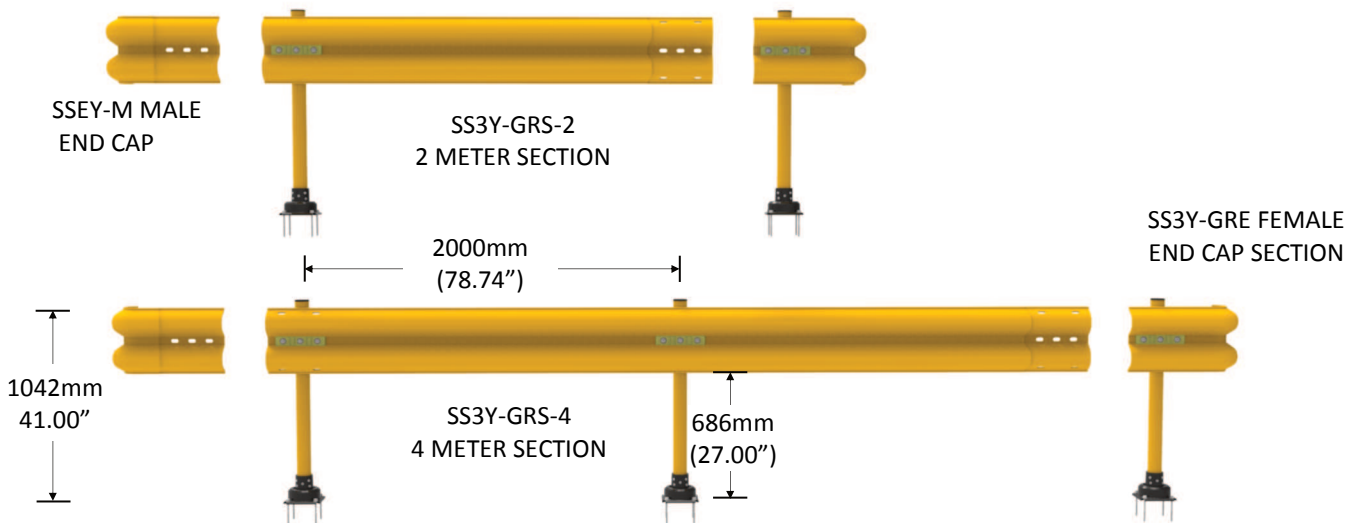

SPECIFICATIONS

- Includes 3" SlowStop Bollards—42" / 1067mm tall
- Rail Break Strength: 11.2 kN / 2517lbf
- Stopping Power Rating 10,851 Joules— 90° Rail Impact
- Max deflection: 85cm / 33.5" at break
- Temperature Rating: -40°C to 115°C
- Traffic Yellow (RAL 1023) Throughout
- No bending equipment required for curves (16' / 4.87m min. radius)
- Custom Heights Available

RECOMMENDED USES

- Industrial Equipment Protection
- Pedestrian Aisle Ways
- Utility Guarding
- Access Denial
- Parking Perimeters

