



# SlowStop® FlexRail PC Guard Rail—4m / 2m (60-5250 / 60-5279)

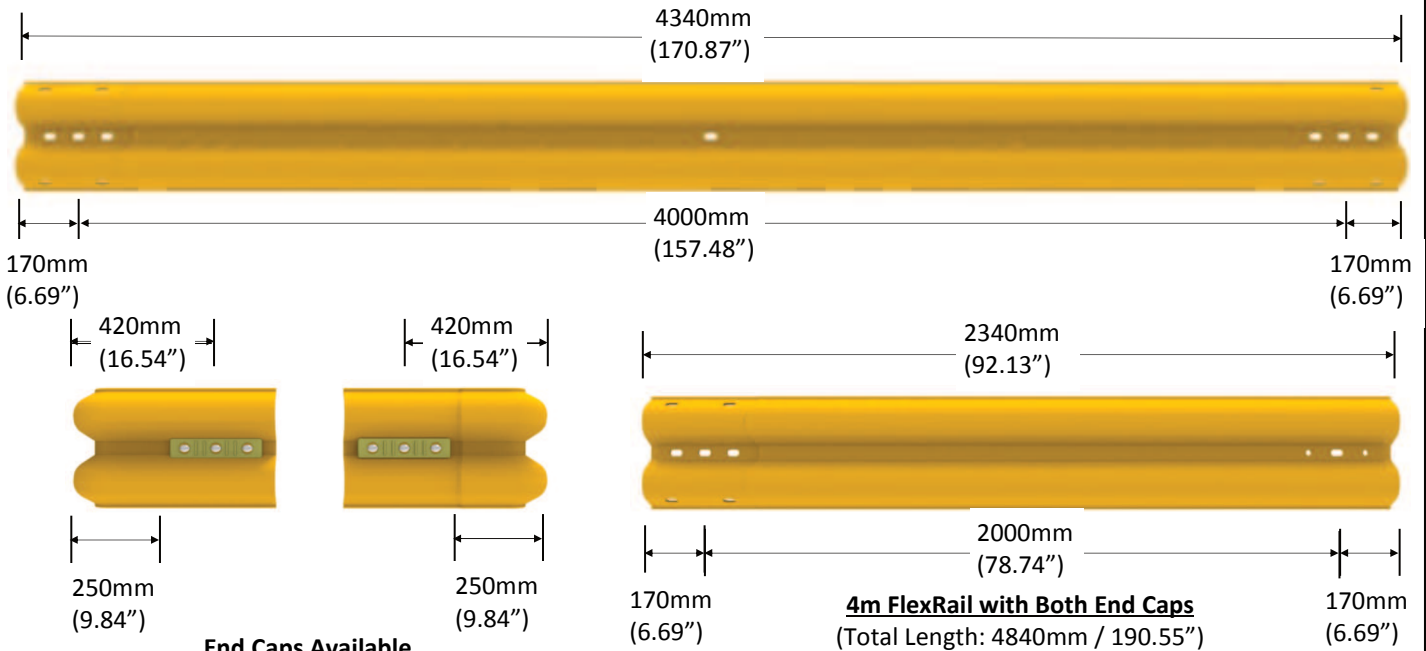

SSEY—Female, attaches to indented end  
SSEY-M—Male, attaches to straight end

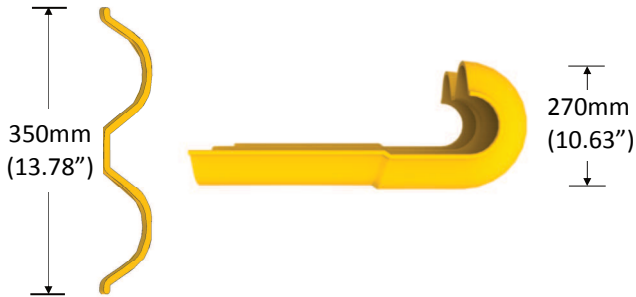

## SPECIFICATIONS

- Break Strength: 24,832 lbf / 110 kN
- 12,971 Joules / 9567 ft-lb (static mount @ 45°)
- Max deflection: 21" / 56cm (static mount)
- Temperature Rating: -40°F/C to 239°F / 115°C
- Traffic Yellow (RAL 1023)
- Weight: 40 lb / 18 kg (approx. 25% compared to steel)
- No bending equipment required for curves

## RECOMMENDED USES

- Mount to SlowStop® Rebounding Bollards for increased strength and system durability
- Industrial Equipment Protection
- Pedestrian Aisle Ways
- Utility Guarding
- Access Denial
- Parking Perimeters

