


# SlowStop® Rebounding Bollard – 5” Round Base (SS5Y-42-RB)

**Color:** RAL 1023 Safety Yellow Bollard (Call for Custom Options)  
RAL 9005 Black Base

**Diameter:** 5.56” (5” ANSI Schedule 40)  
**Height:** 42”


**Set Screws:** 6 M16 x 2.00  
8mm Hex

**Cap:** Black Plastic

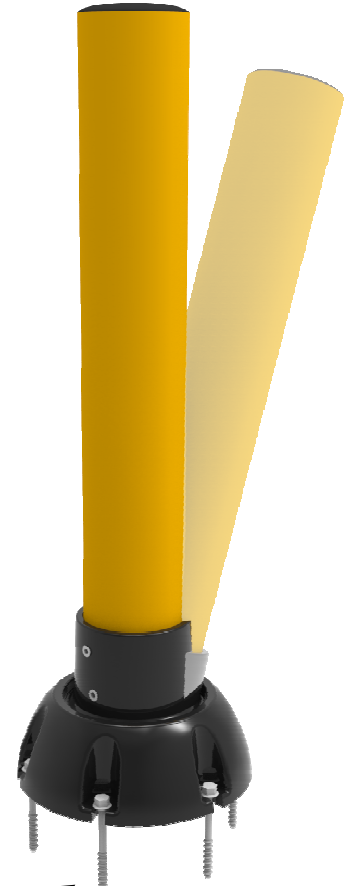

MASS (LBS)	5000	7500	10000	15000	20000	25000	30000	40000	80000
SPEED (MPH)									
1.0	Green	Green	Green	Green	Green	Green	Green	Green	Green
1.5	Green	Green	Green	Green	Green	Green	Green	Yellow	Red
2.0	Green	Green	Green	Green	Green	Yellow	Yellow	Red	Red
2.5	Green	Green	Green	Green	Yellow	Yellow	Yellow	Red	Red
3.0	Green	Green	Green	Yellow	Yellow	Yellow	Red	Red	Red
3.5	Green	Green	Yellow	Yellow	Yellow	Red	Red	Red	Red
4.0	Green	Yellow	Yellow	Red	Red	Red	Red	Red	Red
4.5	Green	Yellow	Yellow	Red	Red	Red	Red	Red	Red
5.0	Green	Yellow	Yellow	Red	Red	Red	Red	Red	Red
5.5	Green	Yellow	Yellow	Red	Red	Red	Red	Red	Red
6.0	Yellow	Yellow	Red	Red	Red	Red	Red	Red	Red
6.5	Yellow	Red	Red	Red	Red	Red	Red	Red	Red
7.0	Yellow	Red	Red	Red	Red	Red	Red	Red	Red

Green: No Damage / Negligible Damage  
Yellow: Will Stop / Potential Damage to Guard  
Red: Guard is under-sized



Installs with six (6) 5/8” x 5-1/2”  
Concrete Screw Anchors

### SPECIFICATIONS

- Stopping Power: 14,000 joules / 10,326 ft-lb.
- No Damage Rating: 7,000 joules / 5,163 ft-lb.
- Meets IBC 1607.8.3 requirements to resist 6,000 pounds of force at 27” height
- Temperature Rating: -40°
- Pipe Coating: 60µm Hot Dipped Galvanized + 60µm Polyester Outdoor Powder Coat
- Cast Iron Coating: Environmentally Friendly Water-Based KTL Coating + Powder Coat C5I Rated

### RECOMMENDED USES

- Where forks or cantilevers typically shear bolts
- Medium to Heavy Duty
- Equipment and Storage Rack Guarding
- Drive-Thru Lanes
- Pedestrian Safety
- Access Denial
- Fuel Pump and Utility Protection
- Post-tensioned Concrete
- Not for K-Rated Security Use



**IDEAL WAREHOUSE INNOVATIONS INC**  
Protecting Your People

Toll-Free Phone: 1-866-828-6737  
Toll-Free Fax: 1-844-899-0088  
[idealwarehouse.com](http://idealwarehouse.com)  
[info@idealwarehouse.com](mailto:info@idealwarehouse.com)